




Dialup - Mac OS X Setup

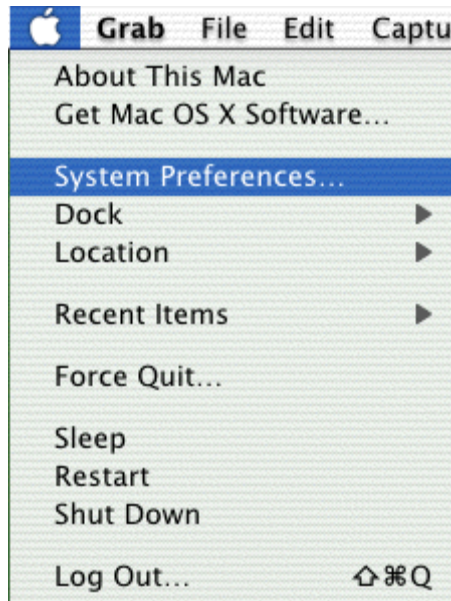


1. From the *Apple* menu, choose *System Preferences*

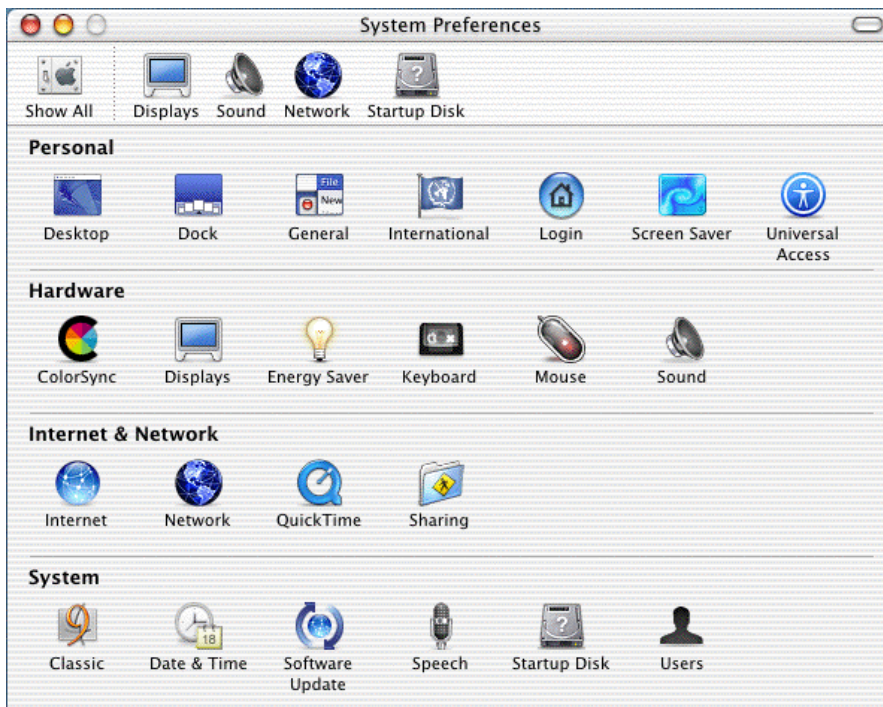


2. Click the *Network* icon.

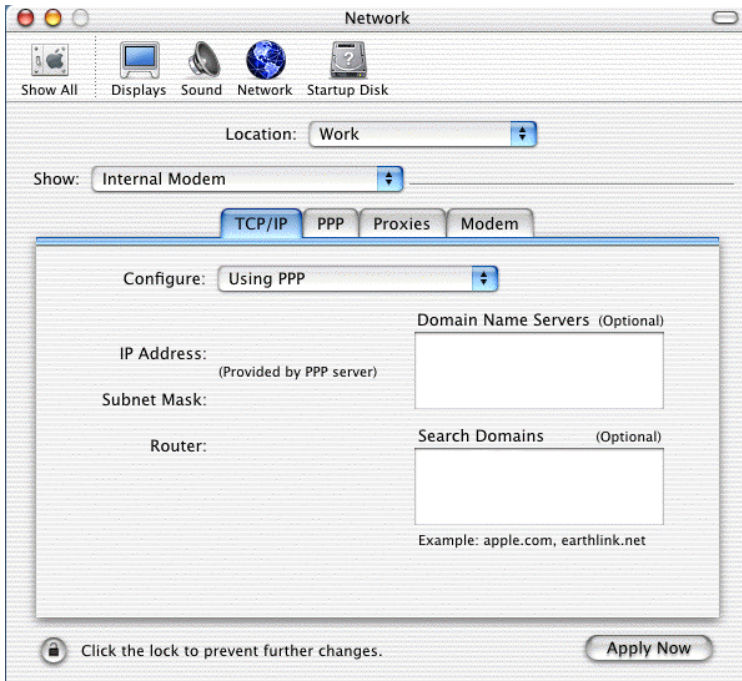


3. Click the arrow box on the *Show* pop-up list and choose *Internal Modem*.
4. Click on the *TCP/IP* tab. Click the arrow box on the *Configure* pop-up list and choose *Using PPP*. In the *Domain Name Servers* box, type in *172.31.252.1*, *64.251.84.12*, and *209.53.200.2*. In the *Search Domains* box, type in *caylix.com*. Click on the *PPP* tab.

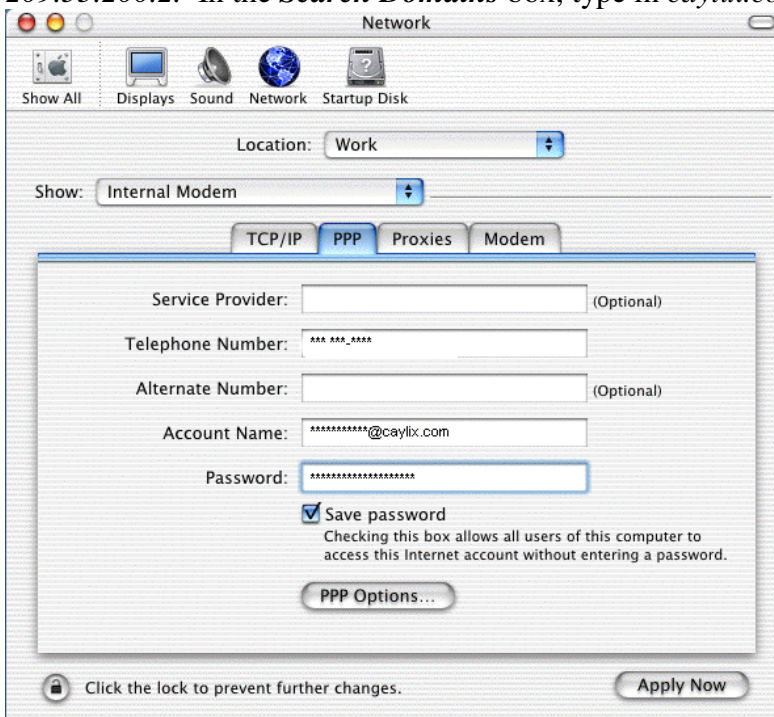


5. In the Telephone Number field, type your *7 or 10 digit Local Dialup Number*.
In the *Account Name* field, type your *Username*.
In the *Password* field, type your *Password*.
Check the box next to *Save password*.
Click the *PPP Options* button.

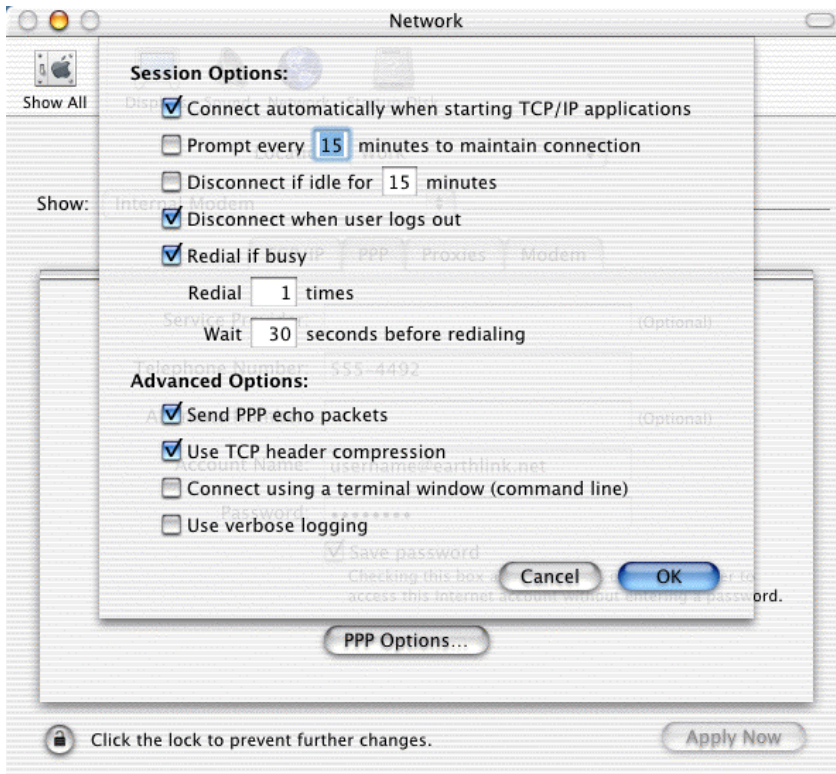

6. Check the box next to *Connect automatically when starting TCP/IP applications*. Uncheck the box next to *Prompt to stay connected*. Uncheck the box next to *Disconnect if idle*. Check the box next to *Disconnect when user logs out*. Click *OK*

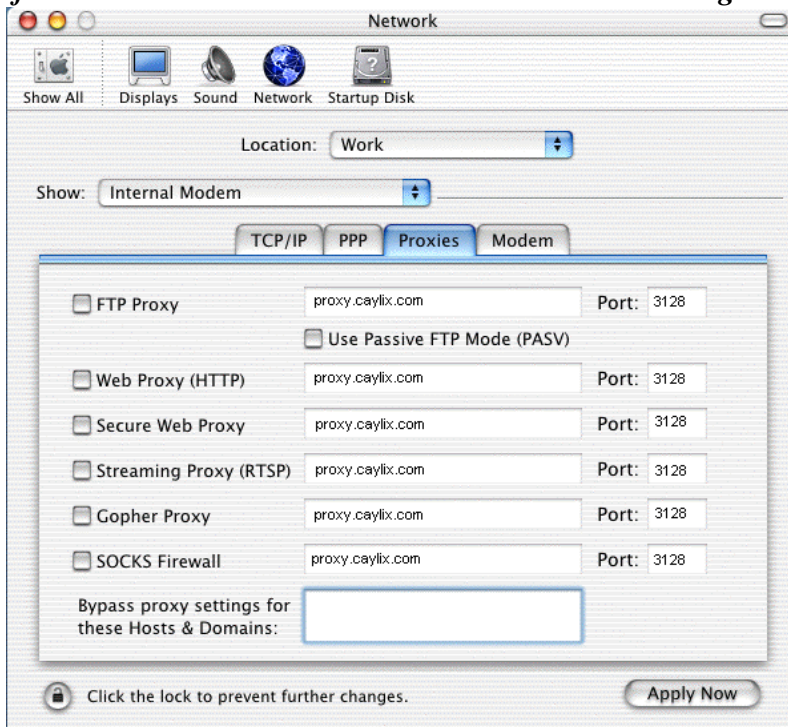

7. Click on the *Proxies* tab. Type *proxy.caylix.com* into all 6 long textboxes. Type *3128* into all 6 short *Port* textboxes. Then click on the *Modem* tab.

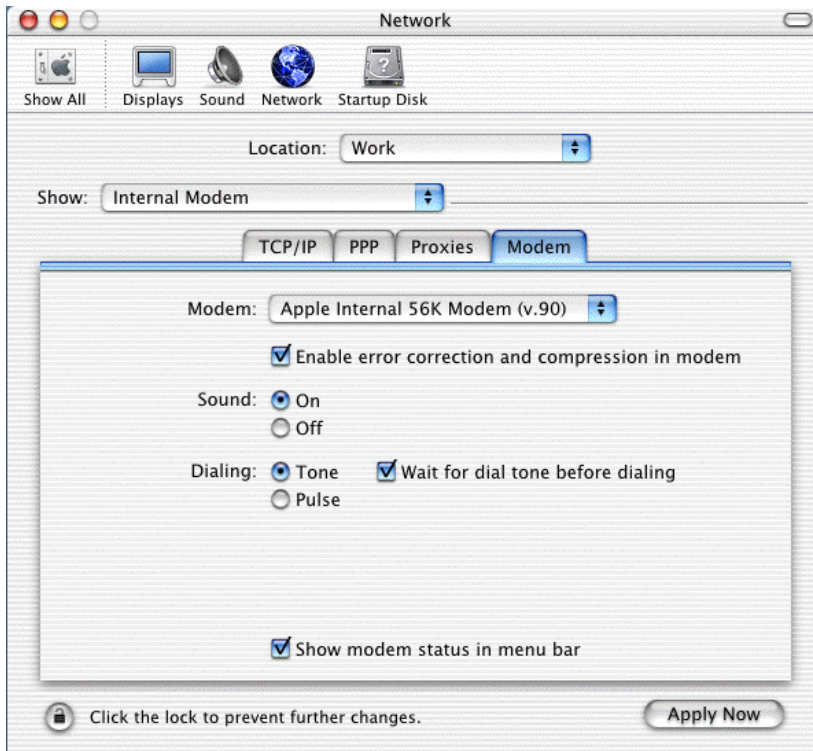

8. Click the arrow box on the *Modem* pop-up list and choose your modem.
Click the *Tone* radio button in the *Dialing* area.
Check the box next to *Show modem status* in *menu bar*.
Click the *Apply Now* button.
Close the *Network* window.